

| REPORT DOCUMENTATION PAGE | | | Form Approved OMB No. 0704-0188 | | |
|---|---------------------------------|------------------------------------|---|--|--|
| Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS. | | | | | |
| 1. REPORT DATE (DD-MM-YYYY) 07 September 2016 | | 2. REPORT TYPE Conference Paper | | 3. DATES COVERED (From - To) 28 June 2016 – 07 September 2016 | |
| 4. TITLE AND SUBTITLE Advanced Tactical Booster Technologies: Applications for Long-Range Rocket Systems | | | 5a. CONTRACT NUMBER | | |
| | | | 5b. GRANT NUMBER | | |
| | | | 5c. PROGRAM ELEMENT NUMBER | | |
| 6. AUTHOR(S) Matthew McKinna, Jason Mossman | | | 5d. PROJECT NUMBER | | |
| | | | 5e. TASK NUMBER | | |
| | | | 5f. WORK UNIT NUMBER Q1EW | | |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/RQRC 10 E. Saturn Blvd. Edwards AFB, CA 93524-7680 | | | 8. PERFORMING ORGANIZATION REPORT NO. | | |
| 9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/RQR 5 Pollux Drive Edwards AFB, CA 93524-7048 | | | 10. SPONSOR/MONITOR'S ACRONYM(S) | | |
| | | | 11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-RQ-ED-TP-2016-172 | | |
| 12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for Public Release; Distribution Unlimited. The U.S. Government is joint author of the work and has the right to use, modify, reproduce, release, perform, display, or disclose the work. PA Clearance Number: 16331 Clearance Date: 7/12/2016 | | | | | |
| 13. SUPPLEMENTARY NOTES For presentation at Future Land Forces Conference; Adelaide, Australia; 5-7 September 2016 Prepared in collaboration with Defense Science & Technology Group (Australian DoD) | | | | | |
| 14. ABSTRACT This paper describes a number of technology advantages currently under development for tactical rocket motors which have direct application to land-based long-range rocket systems. Materials advances that enable superior inert mass fractions, along with innovative optimization design techniques have the potential to allow for increased rocket payload capacity, improved rocket range or increased rocket loadout from the volumetrically constrained environment of a land-based launcher. | | | | | |
| 15. SUBJECT TERMS solid rocket; optimisation; artillery | | | | | |
| 16. SECURITY CLASSIFICATION OF: | | | 17. LIMITATION OF ABSTRACT SAR | 18. NUMBER OF PAGES 3 | 19a. NAME OF RESPONSIBLE PERSON J. Mossman |
| a. REPORT Unclassified | b. ABSTRACT Unclassified | c. THIS PAGE Unclassified | | 19b. TELEPHONE NO (include area code) N/A | |

ADVANCED TACTICAL BOOSTER TECHNOLOGIES

Applications for Long-Range Rocket Systems

Matthew McKinna

Defence Science and Technology Group Weapons
and Combat Systems Division Adelaide, Australia
Matthew.mckinna@dsto.defence.gov.au

Jason Mossman

Senior Aerospace Engineer
Combustion Devices Branch
Aerospace Systems Directorate
Air Force Research Laboratory

Abstract—This paper describes a number of technology advantages currently under development for tactical rocket motors which have direct application to land-based long-range rocket systems. Materials advances that enable superior inert mass fractions, along with innovative optimization design techniques have the potential to allow for increased rocket payload capacity, improved rocket range or increased rocket loadout from the volumetrically constrained environment of a land-based launcher.

Keywords—solid rocket; optimisation; artillery

I. INTRODUCTION

The Australian 2016 Defence White Paper has highlighted the desire for a new long-range rocket system for the future land force [1] capable of providing fire support out to 300 km. Several such systems exist, for example the M270 Multiple Launch Rocket System (MLRS) [2] and M142 High Mobility Artillery System HIMARS [3] which can employ the MGM-140 Army Tactical Missile System (ATacMS) solid propellant missile [4] to achieve the required range. Improvements in tactical solid rocket motor technologies and performance have the potential to directly expand the capabilities of such land-based rocket systems, including increasing their per-shot capacity, through new motor design. The *Advanced Tactical Booster Technologies* Program (ATBT) — a collaboration between the Australian Defence Science and Technology (DST) Group and the United States Air Force Research Laboratory (AFRL) — is currently developing and demonstrating key solid rocket motor technologies to enable new high performance applications. This paper will highlight two key results from ATBT that offer analogous improvements for land based rocket systems: reduction in inert mass fraction, and system level design optimisation.

II. ADVANCED TACTICAL BOOSTER TECHNOLOGIES

Coupled with an experimental effort, the ATBT Program has developed a unique design tool based on evolutionary optimisation methods, to explore the impact and effect of a range of materials technology improvements on the system performance for a notional air-launched high speed system. The reference design employed was a generic ATacMS-sized solid motor. Design optimisations were undertaken across a range of objective scenarios; the two primary being optimising for maximum payload mass carriage to a specified insertion speed, and optimisation for maximum insertion speed with a given payload mass, both from a highly volumetrically constrained platform.

A. Inert Mass Fraction

Reduction of the inert mass, or dead mass, of a rocket motor leads to an increase in the velocity increment the motor can theoretically achieve [5] and is represented in Tsiolkovsky's equation (1) through a reduction in the final mass parameter.

$$\Delta v = I_{sp} g_0 \times \ln\left(\frac{m_0}{m_1}\right) \quad (1)$$

Δv = velocity increment (m/s)

m_0 = initial system mass (kg)

m_1 = final system mass (kg)

I_{sp} = motor specific impulse (s)

g_0 = gravitational acceleration (m/s²)

This gain in performance has been realised in space-launch solid rocket motors through the use of carbon fibre case materials, as in the Vega solid rocket motors [6], replacing more conventional heavy metallic cases. ATBT has explored where such benefits might also be realised on smaller-diameter tactical systems. Point design optimisations were undertaken to directly assess the maximum payload capacity and maximum insertion velocity for a notional air-launched metallic case motor, and an equivalent design using a carbon fibre case (T800S, epoxy resin). The results shown in Table I highlight the influence of case material on the inert mass fraction and maximum payload capacity to a fixed insertion velocity. By using carbon fibre, case mass was reduced by 47% and this is reflected in the improved inert mass fraction; the subsequent optimised payload mass is 8% higher than the metallic counterpart. Based on these results, every 1kg reduction in inert mass improved the mission payload capacity by 1.14kg.

TABLE I. MAXIMUM PAYLOAD MASS DESIGNS

| Case Material | Optimised Design | | |
|--------------------|------------------|-----------------|---------------------|
| | Case Mass | Maximum payload | Inert mass fraction |
| D6AC Metallic | 109 kg | 727 kg | 0.146 |
| T800S Carbon-Epoxy | 58 kg | 785 kg | 0.116 |

Similar optimisation trade studies were conducted across a range of motor physical constraints (length, diameter, payload mass) using a suite of advanced technology options in order to understand their individual effect on inert mass. Using this

data a correlation was established highlighting the impact of inert mass fraction on the ‘lifting capacity’ of the system, shown in Fig. 1, with lifting capacity defined as the payload mass (kg) multiplied by the delivered Mach number, divided by 100. The positive influence of inert mass fraction can clearly be seen, with small changes effecting large improvements in the lifting capacity.

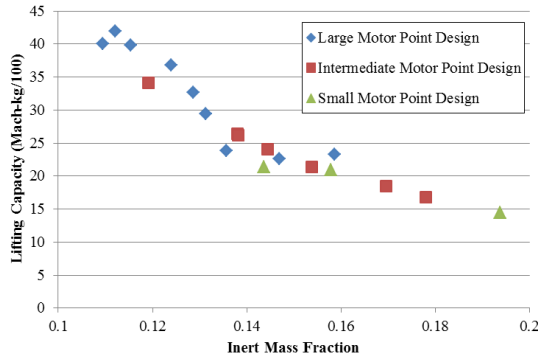


Fig. 1. Effect of inert mass fraction on lifting capacity

In summary, inert mass fraction is a key measure of system performance capability, and technologies which reduce inert mass contribute to better mission performance. While the presented data is anchored in air-launched mission concepts, the same trends apply for a land-based system where improving the inert mass fraction can allow:

- Larger payload masses for a given mission
- Smaller and lighter systems for a given mission
- Increased mission range for a given payload

B. System Optimisation

To assess the relative impact of various technologies on mission performance, a system level optimisation tool was developed for ATBT that included the vehicle trajectory. A global evolutionary optimiser [7] controlled the overall motor design through specification of the propellant grain geometry; each candidate configuration used a nested pseudo-spectral optimisation routine to then determine the most efficient trajectory and subsequent optimal system level design. This approach was able to exploit the multiplicative effect of several technologies, as shown in Fig. 2. Combined, several technology sets reinforce one another for a cumulative benefit greater than the sum of the individual technologies. For example, higher strength carbon fibres not only reduce the system inert mass, they enable use of high energy propellants at higher operating pressures relative to a metal case, which combine to further improve rocket motor total and specific impulse.

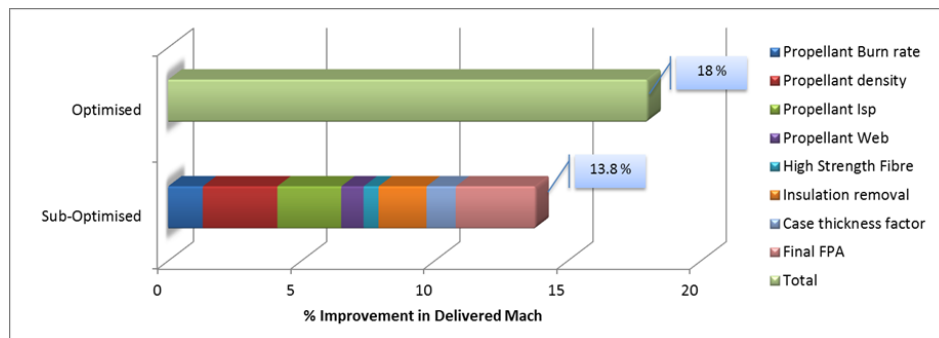


Fig. 2. Influence of total system optimisation on mission performance

When applied to land based systems, this type of mission-based holistic optimisation affords the ability to rapidly and rigorously explore the design space for improved capability by including the rocket motor, desired payload, actual trajectory and the platform volumetric constraints in the analysis.

III. SUMMARY

Tactical solid rocket motors are employed in both land-based and air-launched tactical systems, with many common technology sets. Current research programs for the air-launched scenario are yielding benefits that directly translate to a long-range land-based rocket system. Innovative system design optimisation techniques afford the possibility to fully explore potential capability improvements for a land-based system operating from a physically restrictive environment; optimising for maximum range, payload mass, or number of rounds from a given constrained volume. Underpinning these advantages are the materials technologies such as carbon fibre cases that are allowing far superior inert mass fractions and vastly more efficient rocket motor designs.

ACKNOWLEDGEMENT

The author would like to thank and acknowledge Jason Mossman of the United States Air Force Research Laboratory for his contribution to the Advanced Tactical Booster Technologies study upon which this analysis has been based.

REFERENCES

- [1] Australian Government, Department of Defence, “2016 Defence White Paper”, February 2016.
- [2] Wikipedia. 2016. *M270 Multiple Launch Rocket System*. [ONLINE] Available at: https://en.wikipedia.org/wiki/M270_Multiple_Launch_Rocket_System. [Accessed 21 June 2016].
- [3] Wikipedia. 2016. *HIMARS*. [ONLINE] Available at: <https://en.wikipedia.org/wiki/HIMARS>. [Accessed 21 June 2016].
- [4] Wikipedia. 2016. *MGM-140 ATACMS*. [ONLINE] Available at: https://en.wikipedia.org/wiki/MGM-140_ATACMS. [Accessed 21 June 2016].
- [5] Biblarz, O., Sutton, G., “Rocket Propulsion Elements, 8th Edition”, Wiley, 2010.
- [6] Bianchi, S., Serraglia, F., Giliberti, F., Betti, F., Milana, C., “Vega Solid rocket Motors Development and Qualification” AIAA Paper 2010-7084, July 2010.
- [7] Wikipedia. 2016. *CMA-ES*. [ONLINE] Available at: <https://en.wikipedia.org/wiki/CMA-ES>. [Accessed 21 June 2016].